
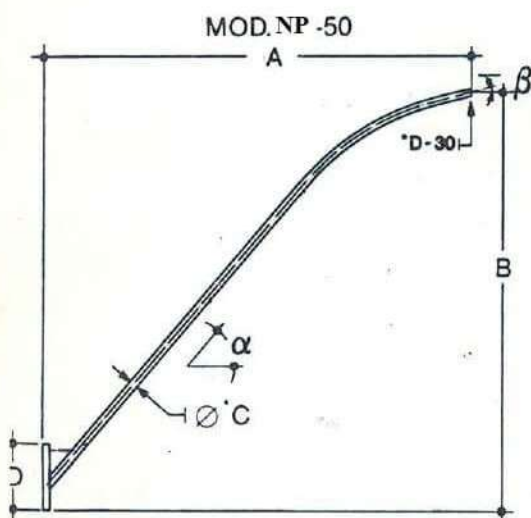
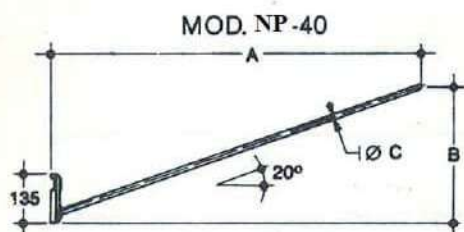
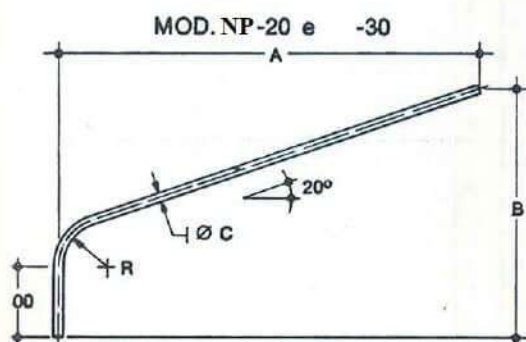


Especificações técnicas

Dimensões (mm)

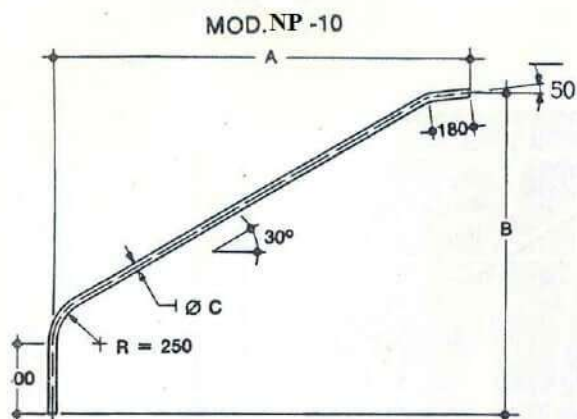

BRAÇO NP-10

Modelo	A	B	Ø C		K
			Bitolas	Ø Ext.	
NP-10/10	3140	2275	2"N	60,3	30
NP-10/20	3820	2650	2"N	60,3	25

BRAÇO NP-20

Modelo	A	B	R	Ø C		K
				Bitolas	Ø Ext.	
NP-20/10	1000	1120	500	1 1/2"N	48,2	30
NP-20/15	1500	1300	500	1 1/2"N	48,2	25
NP-20/20	2000	1480	500	1 1/2"N	48,2	20
NP-20/25	2500	1660	500	1 1/2"N	48,2	15

BRAÇO NP-30

Modelo	A	B	R	Ø C		K
				Bitolas	Ø Ext.	
NP-30/10	1000	945	250	2"N	60,3	40
NP-30/15	1500	1130	250	2"N	60,3	35
NP-30/20	2000	1315	250	2"N	60,3	30
NP-30/25	2500	1500	250	2"N	60,3	25
NP-30/30	3000	1685	250	2"N	60,3	20
NP-30/35	3114	1700	250	2"N	60,3	25

BRAÇO NP-40

Modelo	A	B	Ø C		K
			Bitolas	Ø Ext.	
NP-40/10	1000	370	3/4"N	25,4	15
NP-40/15	1500	540	3/4"N	25,4	10
NP-40/20	2000	700	3/4"N	25,4	5

BRAÇO NP-50

Modelo	A	B	Ø C		D	α	β	K
			Bitolas	Ø Ext.				
NP-50/33	1991	1650	1"N	33,5	260	40°	15°	10
NP-50/48	2530	2180	1 1/2"N	48,2	350	50°	10°	15
NP-50/60	2530	2180	2"N	60,3	350	50°	10°	25

Nota: (k) = peso (kg) máximo da luminária a ser instalada.
(N) = Nominal